


## ActivEV Pulse Golf Bag Holder Installation


- Kit components:

- Pre-built golf bag holder assembly
- Hardware kit
  - 4X Stainless steel M8-75mm bolts
  - 4X Stainless steel M8 acorn nuts
  - 8x Stainless steel flat washers
  - 4X Stainless steel lock washers
  - 2X vibration dampening mounting pads

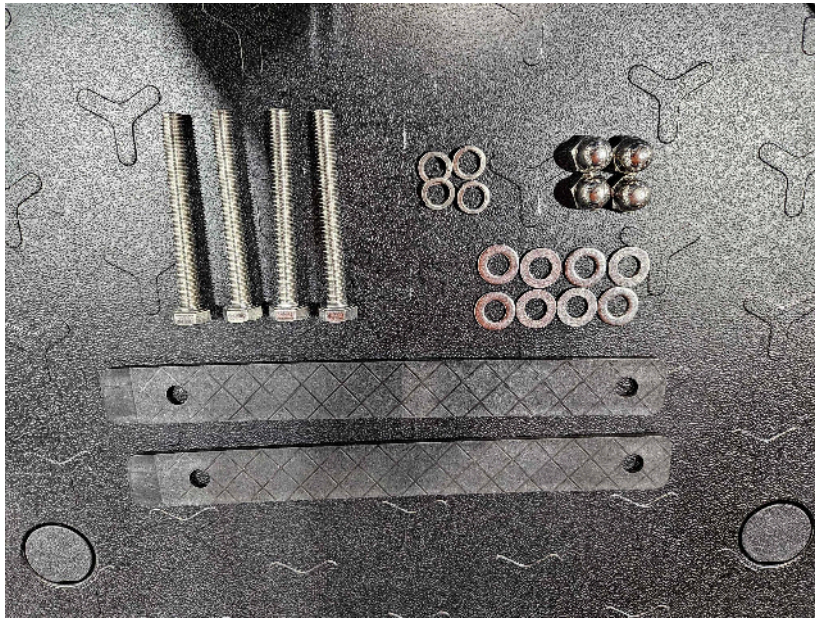

## **Installation:**

1. Align the center of the vibration dampening mounting pads with the center of the vertical crossbar on the grab bar on the rear of the cart. Using the mounting pads as a template, mark the location of the top and bottom hole with a paint pen, center punch or similar marking tool. The mounting pads are asymmetrical, but can be installed in either direction as long as they are installed the same way on each side.

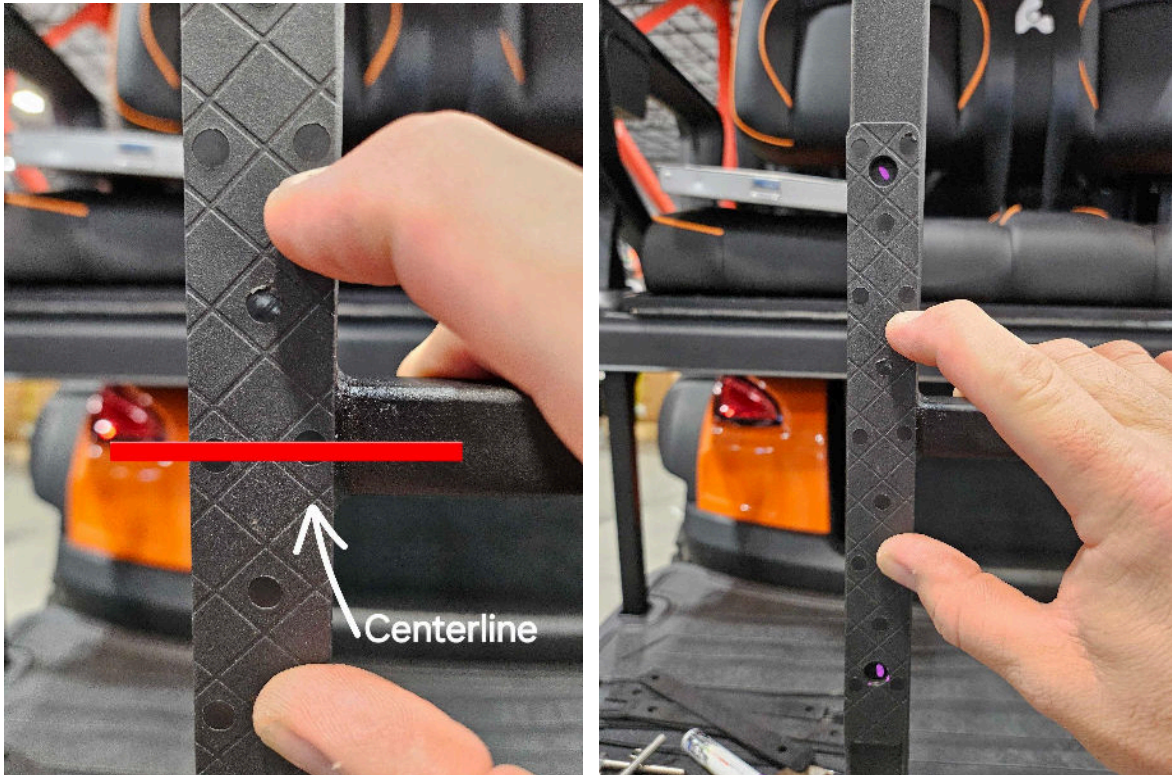



2. Next, mark the hole locations on the Golf bag holder assembly using the same process.



3. Drill the four holes marked in the previous steps with an 11/32" drill bit. Drill all the way through both sides of the grab bar/golf bag holder assembly.



4. Install an M8 flat washer onto 2 of the M8x70 bolts. Insert these bolts into the top holes on the golf carts grab bar, then slide the mounting pads over the bolts.



5. Next, slide the golf bag holder assembly onto these bolts. At this time, you can install an M8 flat washer, an M8 Lock washer, and then an M8 acorn nut onto the bolts installed earlier in this step, but do not tighten down the hardware.





6. Once the golf bag holder assembly is hung in place on the top bolts, you can insert the bottom bolts using the same procedure. If the bottom bolt holes are slightly mis-aligned, you can use the drill with the same 11/32" drill bit to drill out any mis-alignment. Insert the drill from the cart side, and run the bit through both the cart and the golf bag holder assembly at the same time. Make sure to swing the vibration mounting pads out of the way, so that the drill bit does not damage them. Once all four bolts are in place, you can tighten the hardware with 13mm wrenches.



Installation is now complete. It's recommended that the folding seat is folded out when the golf bag holder assembly is loaded and weight-bearing, as the seat helps to support the grab bar when it's in the extended position.



**\*\*\*DISCLAIMER\*\*\***

**\*\*\*\*\*Modification to the backup camera and tag light need to be performed in order to install this accessory correctly. Please feel free to reach out to the email or number above with any questions/concerns you may have\*\*\*\*\***

**We appreciate your business and hope you enjoy your new accessory!**